

YOUR SB1200: CONFIGURED TO YOUR PREFERENCES

1 SB1200 BASIC (BLACK)

- 12.1" touch screen
- 2 grinders 1.2kg/1.2kg
- iQFlow™
- Single spout (automatic height adjustment 80–180 mm)
- Hot water spout positioned centrally in single spout
- Telemetry ready and on board
- Cup detection
- First Shot

OPTIONS COFFEE MACHINE:

- Iced Coffee Module (IC) (right-hand)
- Powder dosing unit (right-hand, not possible with IC)
- Grounds ejection
- Lockable hopper(s)



FLAVOR STATION



Automatic dosing station for up to six flavors

CLEANMASTER

Fully automatic cleaning process meeting highest hygiene standards



CleanMaster Module for Media Pump Module and Flavor Station

2 ACCOUNTING SYSTEM

Can be used for various payment methods, e.g. coins, cards. Ideally suited to public/private vending applications.

3 CUP WARMER

With four heatable trays

4 FLAVOR STATION

- Automatic dosing station for up to six flavors
- Empty message
- Plugin connectors (CMB)
- Flavor Station CleanMaster



FLEXIBILITY


Basic configuration:

- 1 x One Media Pump Module for milk (FM)
- Empty message
- 1 x 10 liter container
- Plugin connectors (CMB)
- CleanMaster Pump Module

Main features:

- Increased capacity up to 40 liters
- 1–4 Media Pump Modules for milk, cold brew or other media requested
- Media supply with Franke 10 liters container or Bag-in-Box with CMB plugin connectors

COOLING UNIT UT40 CM WITH MEDIA PUMP MODULES

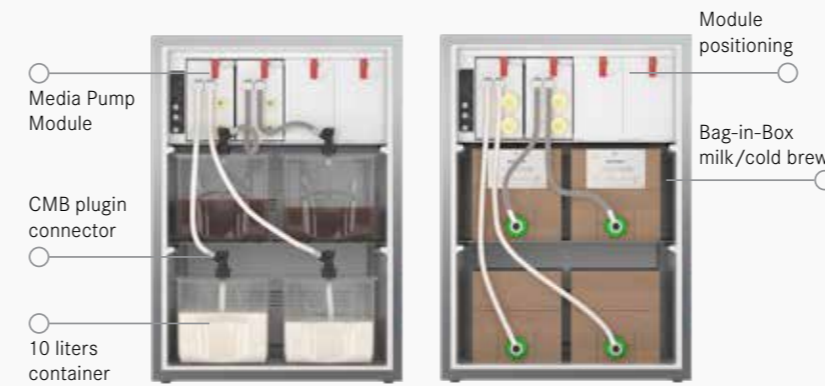

OPTIONS MEDIA PUMP MODULES (Currently following options available)


2 PUMP MODULES

2 x One Media Pump Module




One milk type
10 liters
One cold brew
10 liters

1 x Double Media Pump Module 1 x One Media Pump Module

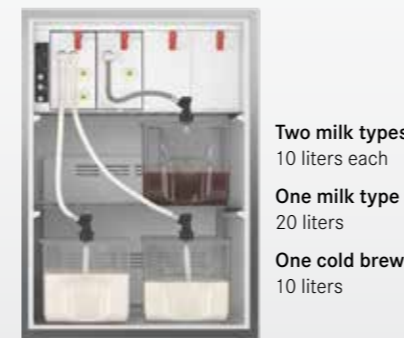

Two milk types
10 liters each
One milk type
20 liters
One cold brew
10 liters

1 x One Media Pump Module 1 x Double Media Pump Module

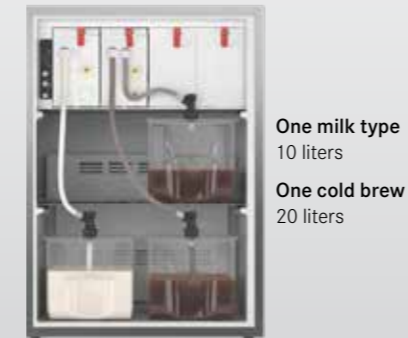

One milk type
10 liters
One cold brew
20 liters


2 x Double Media Pump Module



Two milk types
10 liters each
One milk type
20 liters
One cold brew
20 liters

3 PUMP MODULES

1 x Double Media Pump Module 2 x One Media Pump Module

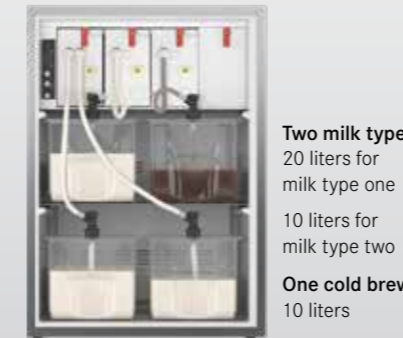

Two milk types
20 liters for milk type one
10 liters for milk type two
One cold brew
10 liters

SB1200 SPECIALTY BEVERAGE STATION

Introducing the breakthrough innovation that increases beverage choices. With our new, game-changing and versatile Specialty Beverage Station, it's all about the moment when leading technology helps you take customer satisfaction to a whole new level. Unique to Franke, our Specialty Beverage Station offers maximum choice and modularity, fitting into any customer environment. Featuring a vast variety of beverages – from espresso-based beverages to iced coffee, cold brew and flavored drinks – it presents an exciting opportunity to

exceed customer expectations and boost your business. Our state-of-the-art iQFlow™ technology is integrated as a standard feature and the SB1200's intuitive 12.1" touch screen enables your customers to quickly and easily serve themselves delicious hot and cold beverages on demand. All this is further enhanced with the fully automatic CleanMaster cleaning system, designed to ensure optimal hygiene with minimum effort.

The interactive 12.1" touch screen guides the customer to their choice of beverage using realistic photos of the beverages and a step-by-step selection process



Patented brewing unit, removable from the front



Combi-dispenser system to provide all beverages, including hot water, centrally from the machine



iQFlow™
The groundbreaking technology that extracts more flavor for unrivaled in-cup quality



TOUCH SCREEN
Outstanding customer experience thanks to our unique, interactive 12.1" touch screen



CLEANMASTER
Automatic cleaning system – for all resources



MAKE IT WONDERFUL

Franke Kaffeemaschinen AG
cs-info.ch@franke.com

Franke Coffee Systems GmbH
cs-info.de@franke.com

Franke Coffee Systems Americas
cs-coffeesales.us@franke.com

Franke Coffee Systems UK
sales@frankecoffeesystems.co.uk



coffee.franke.com




MAKE IT WONDERFUL

TECHNICAL DATA


MACHINE MODEL

Model	Power
SB1200	380-415 V 3LNPE 50/60 Hz 6,7-7,9 kW (16 A) 220-240 V 1LNPE 50/60 Hz 2,4-2,9 kW (16 A) 200-220 V 1LPE 50/60 Hz 4,7-5,7 kW (30 A) 220-240 V 1LNPE (30A)
Dimensions	340 mm / 750 mm / 600 mm (W/H/D)
Weight (empty)	approx. 58 kg
Color	Black



WATER CONNECTION

Fixed water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80-800 kPa (0,8-8,0 bar)
Flowrate	>0.1l/sec
Water temperature	<25°C
Water hardness	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
Chloride content	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content/pH value	6.5-7.5 pH
Chlorine content	< 0.5 mg/l



WATER DRAIN


Drain hose	Dia. = 16 mm, L = 2000 mm
-------------------	---------------------------

ADD-ON UNITS

REFRIGERATION UNIT	UT40 CM
Electrical connection	220-240 V 1LNPE 50/60 Hz 0.72 A (10 A) 110-127 V 1LNPE 60 Hz (10 A)
Dimensions	525 mm / 740 mm / 686 mm (W / H / D)
Weight (empty)	approx. 38 kg
Colors	Door anthracite, body black




FLAVOR STATION	FSU60 CM
Electrical connection	100-240 VAC, 1L N PE, 50-60 Hz
Dimensions	264 mm / 4150 mm / 350 mm (W / H / D)
Weight (empty)	approx. 13 kg
Colors	Black

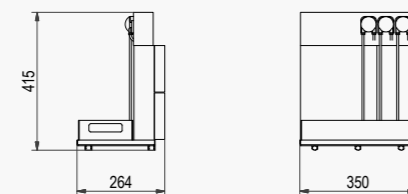


ADD-ON UNITS


CLEANMASTER BOX	CM Pump Module + Flavor Station
Electrical connection	100-240 V, 1L N PE, 50-60 Hz
Dimensions	182-366mm / 193 mm / 395mm
Weight (empty)	approx. 2.5-4kg
Colors	Black

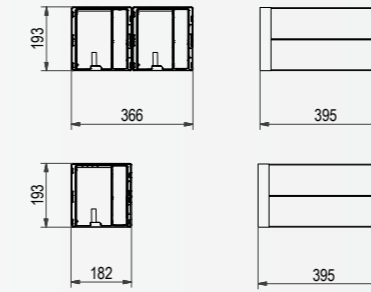


ACCOUNTING SYSTEM	AC 200
Accounting systems	Coin validator, Coin changer, Cashless system
Electrical connection	85-264 V 1LNPE 50/60 Hz (10 A)
Dimensions	200 mm / 630 mm / 453 mm (W / H / D)
Weight (empty)	approx. 18 kg
Colors	Black, white or anthracite

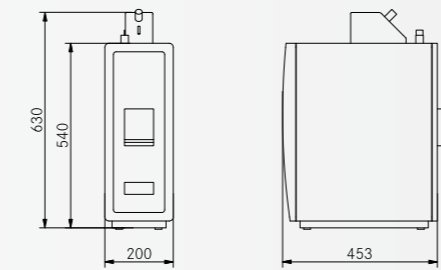

ACCOUNTING SYSTEM	AC 125CL
Electrical connection	85-264V 1LNPE 50/60 Hz (10A)
Dimensions	125 mm / 150 mm / 310 mm (W / H / D)
Weight (empty)	approx. 2 kg
Colors	Black



CUP WARMER	CW
Electrical connection	220-240 VAC, 1L N PE, 110-130W, 50-60 Hz 110-127 VAC, 1L N PE, 80-130W, 50-60 Hz 100 VAC, 1L N PE, 80W, 50-60 Hz 220 VAC, 1L N PE, 110W, 50-60 Hz 270 mm / 540 mm / 454 mm (W / H / D)
Dimensions	approx. 20 kg
Weight (empty)	Black or anthracite
Colors	

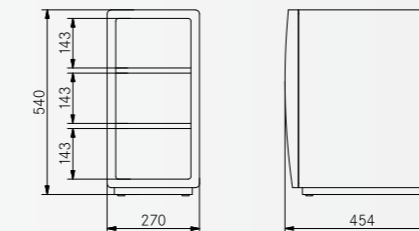

SB1200 Coffee Machine

CleanMaster

Cooling Unit UT40 CM with Media Pump Modules

Flavor Station

Furniture not part of Franke's Specialty Beverage Station - must be sourced by customer.